



# MODEL T160



- 2.8 KHZ FREE FLOODED RING
- BROADBAND
- HIGH POWER
- OMNI-DIRECTIONAL BEAM PATTERN
- UNLIMITED DEPTH
- LONG RANGE TRANSMISSION

The T160 is one of a range of high power, low frequency transducers recently developed by Neptune Sonar. Based upon the standard Free Flooded Ring (FFR) concept, the transducer utilises the latest technology to achieve a highly efficient projector capable of operating down to full ocean depth.




The T160 is available with or without acoustic calibration, traceable to National Standards.

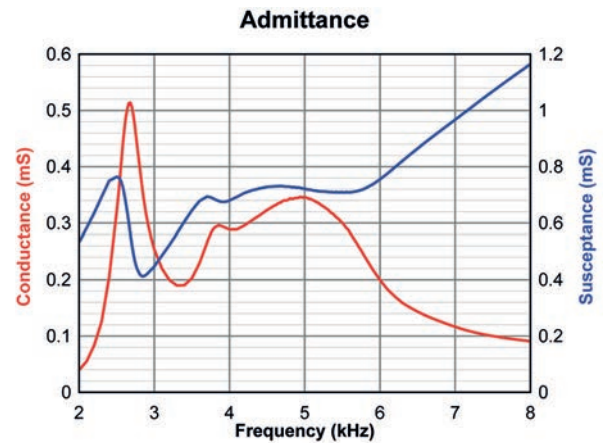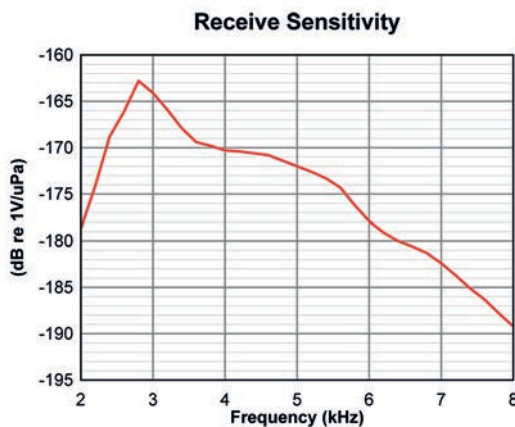

## TECHNICAL SPECIFICATION

Resonant Frequency (Nominal)	2.8 kHz
Useful Operating Band	2.5 kHz to 6 kHz
Beam Pattern (Horizontal)	Omni ± 2 dB up to 6 kHz
Beam Pattern (Vertical)	Toroidal (See Graph)
Receive Sensitivity	-165 dB re 1V/μPa
Transmit Sensitivity	134 dB re 1μPa/V @ 1m
Capacitance at 1 kHz (with 10m cable)	38,000 pF
Transmit Voltage (Abs. Max)	750 Vrms (Minimum 10m depth)
Transmit Voltage / Duty Cycle (Max)	750 Vrms at 10% 250 Vrms at 100%

# MODEL T160

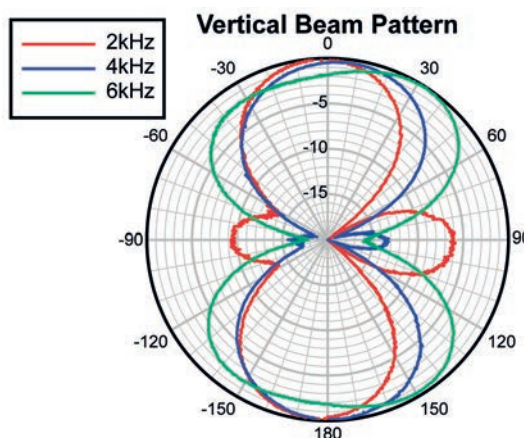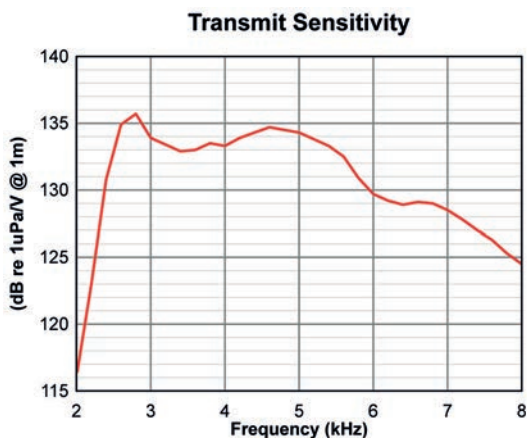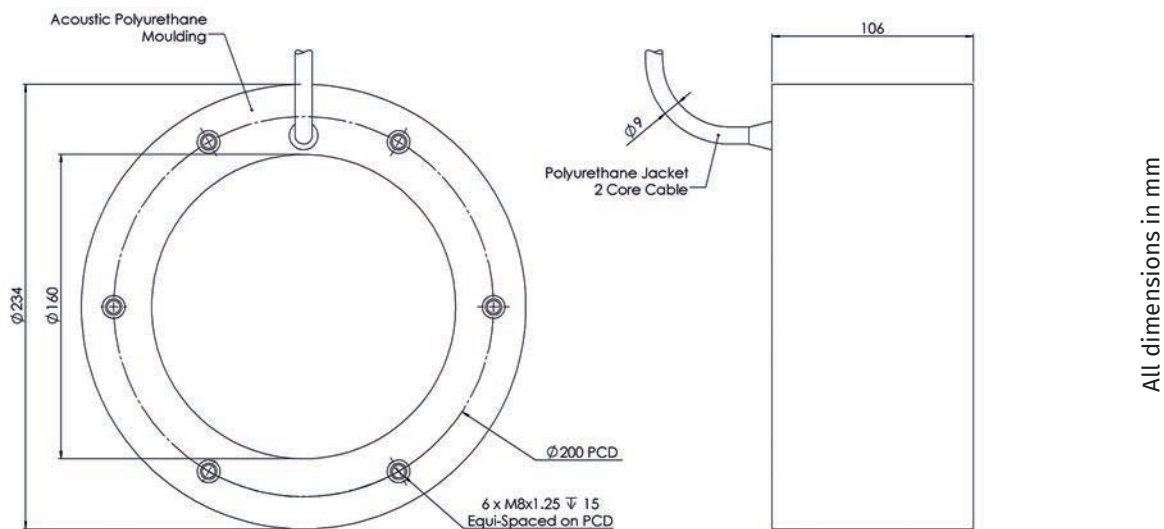

## MECHANICAL SPECIFICATION

Operating Depth	Unlimited
Weight Air / Water (with 10m cable)	5.7 kg / 2.6 kg
Operating Temperature	-5 to +40 °C
Storage Temperature	-40 to +80 °C
Cable Type	Ø9mm Polyurethane Jacket, Screened Twisted Pair
Cable Length	10m Standard (Additional lengths supplied to order)
Connector	Not fitted as standard (Optional BNC or Customer Specific)